


EXPANSION JOINTS

Rubber Expansion Joint

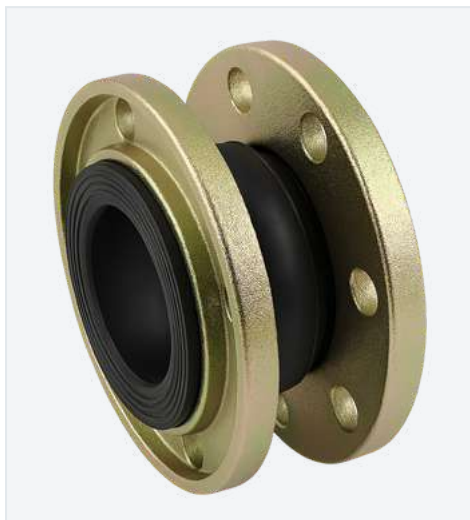

TECHNICAL DATA

Connection	EN1092-2
Working pressure	PN16
Working temperature	-10°C / +60°C

WHERE IT IS USED

- Power Plants
- Chemical - Petrochemical
- Maritime Applications
- Heating - Cooling Systems
- Food
- Mining Applications
- Water - Wastewater

DIMENSION TABLE

DN	L	ØD1	ØD	k	b	Ødxn	KG
32	100	76	140	100	18	18x4	2
40	100	76	150	110	18	18x4	2,5
50	100	86	165	125	20	18x4	3
65	100	101	185	145	20	18x4	3,85
80	100	116	200	160	20	18x8	4,50
100	100	140	220	180	22	18x8	5,50
125	120	168	250	210	22	18x8	7,50
150	120	198	285	240	24	22x8	8,85
200	120	254	340	295	26	22x12	11
250	130	312	405	355	28	26x12	16,5
300	130	375	460	410	28	26x12	24,5
350	160	432	520	470	30	26x16	32,5

MATERIAL LIST

No	Part	Material
1	FLANGE	GGG40 / ST37 / AISI304 / AISI316
2	WIRE	SPRING STEEL
3	BELLOWS	EPDM / NBR

DATA SOURCE

Metroend-Urun-Katalogu.pdf · printed page 85 (PDF 88)

All content in this datasheet is taken from the catalog page referenced above; values are transferred verbatim, with no estimation or unit conversion. It contains no price or stock information.

METROEND MÜHENDİSLİK SAN. TİC. LTD. ŞTİ

Küçükbakkalköy Mah. Selvili Sk. No: 4, İç Kapı No: 20, Ataşehir /
İstanbul

+90 546 224 41 94 · sales@metroend.com

<https://vana.bogahost.com/en/expansion-joints/rubber-expansion-joint>

www.metroend.com